



Item No. _____

Project _____

Quantity _____

BakerSeries® Roll-In Rack, Two Door Proofer

Model: LRP2-Series



Model LRP2-30 shown
(Rack not included)

MODEL/RACK CAPACITY GUIDE

Model/ Depth	Single Side Load 28.4"W x 18"D	Single End Load 26"W x 20.4"D	Double Side Load 36"W x 28.3"D
LRP2-30	2 Racks	3 Racks	0 Racks
LRP2-40	4 Racks	3 Racks	2 Racks
LRP2-50	5 Racks	5 Racks	2 Racks
LRP2-60	6 Racks	6 Racks	3 Racks
LRP2-70	7 Racks	7 Racks	3 Racks
LRP2-80	9 Racks	8 Racks	4 Racks
LRP2-90	10 Racks	10 Racks	5 Racks
LRP2-100	11 Racks	10 Racks	5 Racks
LRP2-110	12 Racks	13 Racks	5 Racks
LRP2-120	14 Racks	13 Racks	7 Racks

SHORT/BID SPECIFICATION

Proofer shall be a Lang Bakery Equipment Co. Model LRP2- ____ [Insert: 30, 40, 50, 60, 70, 80, 90, 100, 110 or 120 depth] 5 to 13.2-kW [depending on size] electric heated, two door roll-in rack unit, with: quick response air-wash humidity/heat system; modular panel construction with cam-lock assembly; 300 Series stainless steel interior, protected with cart bumpers; two heavy duty doors with magnetic seal/closure system and full width protective bar handle; simple, computerized controls, door mounted at eye level, with accurate digital humidity, time and temperature readouts; plus all the features listed and options checked:

STANDARD PRODUCT WARRANTY

CONSTRUCTION FEATURES

- Heavy duty stainless steel exterior with 300 Series stainless steel interior and aluminized steel top
- Modular wall and ceiling panels, designed for cam-lock on-site assembly
- Gasket seals provided at all seams and panel joints
- Quick response air-wash humidity/heat system
- Heavy duty doors hinged right & left, with removable magnetic door seal and closure system

PERFORMANCE FEATURES

- 70-120°F temperature range
- Very accurate relative humidity control with 50-95% operating range
- Same heating elements generate both heat and humidity. [No submerged elements]
- Interior bumpers protect proofer walls from rack damage
- Full width grab bar handle protects door from rack dents

CONTROL PACKAGE

- All controls located within right hand door at eye level
- Digital set TEMPERATURE, set HUMIDITY & TIME remaining displays
- Set temperature touch pads [1°F increments]
- Set relative humidity touch pads [1% increments]



Sheet No. LSP-RR6 (rev. 10/05)


INSTALLATION REQUIREMENTS

- Proofer shipped as modular panels for on-site assembly
- Ⓔ 208V/240V, 1 or 3-phase connection
- Ⓜ 1/2" NPT cold water connection

- ⓓ 1/2" NPT vented drain connection
(Connections from top and rear. See below)

OPTIONS & ACCESSORIES

- ☐ Stainless steel floor

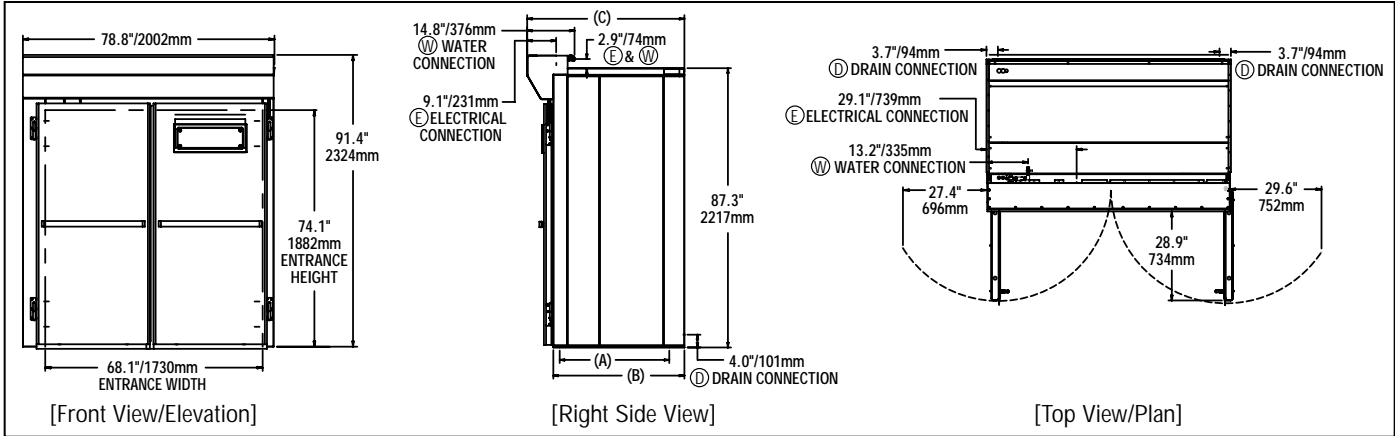

Model	Height		Width		Depth			Weight		Freight Class
	Internal	External	Internal	External	Internal "A"	External "B"	Overall "C"	Actual	Shipping	
LRP2-30	74.1" 1882mm	91.4" 2324mm	68.1" 1730mm	78.8" 2002mm	27.1" 688mm	31.0" 787mm	39.3" 998mm	930 lbs. 422 kg	1,180 lbs. 535 kg	70
LRP2-40					37.1" 942mm	41.0" 1041mm	49.3" 1252mm	1,125 lbs. 510 kg	1,375 lbs. 624 kg	
LRP2-50					47.1" 1196mm	51.0" 1295mm	59.3" 1506mm	1,200 lbs. 544 kg	1,450 lbs. 658 kg	
LRP2-60					57.1" 1450mm	61.0" 1549mm	69.3" 1760mm	1,275 lbs. 578 kg	1,525 lbs. 692 kg	
LRP2-70					67.1" 1704mm	71.0" 1803mm	79.3" 2014mm	1,350 lbs. 612 kg	1,600 lbs. 726 kg	
LRP2-80					77.1" 1958mm	81.0" 2057mm	89.3" 2268mm	1,525 lbs. 692 kg	1,775 lbs. 805 kg	
LRP2-90					87.1" 2212mm	91.0" 2311mm	99.3" 2522mm	1,550 lbs. 703 kg	1,850 lbs. 839 kg	
LRP2-100					97.1" 2466mm	101.0" 2565mm	109.3" 2776mm	1,625 lbs. 737 kg	1,925 lbs. 873 kg	
LRP2-110					107.1" 2720mm	111.0" 2819mm	119.3" 3030mm	1,725 lbs. 782 kg	2,025 lbs. 919 kg	
LRP2-120					117.1" 2974mm	121.0" 3073mm	129.3" 3284mm	1,950 lbs. 885 kg	2,250 lbs. 1021 kg	

Model	Ⓔ Electrical Requirements				Clearance from combustible (inches from side, back)**	Ⓜ Water Requirements	ⓓ Drain Requirements
	Voltage	Total kW	1 Phase	3 Phase			
LRP2 (30 - 80)	208VAC/60Hz 240VAC/60Hz	5.0 6.6	24.0A 27.5A	13.8A 15.8A	0	1/2" NPT (1.5GPM @ 40PSI)	1/2" NPT (210°F, 1GPM max.)
LRP2 (90 - 120)*	208VAC/60Hz 240VAC/60Hz	10.2 13.2	48.0A 55.0A	27.6A 31.6A			

* Features two humidification systems. ** Noncombustible floor only.

MINIMUM WATER QUALITY

- pH between 7.0 and 7.5
- Total dissolved solids less than 100 PPM
- Chlorine less than 1 PPM
- Iron less than 0.1 PPM
- Manganese less than 0.05 PPM
- Conductivity less than 1/500,000Ω per inch
- Hardness from 6.3 to 8.8 grains per gallon
- Chlorides less than 30 PPM
- Sulfates less than 40 PPM
- Copper less than 0.05 PPM
- Chloramines less than 1 PPM

IMPORTANT: Your local water conditions may damage your Lang equipment. Failure to properly treat water may result in damage and may void some or all of the warranty. Information on water quality requirements is in the operator's manual provided with each unit, which can be accessed through the Lang web site at www.langworld.com/products.

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-RR6 (rev. 10/05)

LANG BAKERY EQUIPMENT COMPANY • 6500 Merrill Creek Parkway, Everett, WA 98203
TOLL FREE: 888-RACKOVN (888-722-5686) • FAX: 866-947-0122 • www.langbakery.com